



# Series 800 Vertisockets™ Horizontal Mounting with Bifurcated Contacts

## FEATURES:

- Aries offers a full line of Vertisockets™ for DIP packaging of LEDs, incandescent lamps, DIP switches, test points, etc. The variations of mounting position and pin configuration provide exceptional design freedom.
- Restricted entry for contact protection.
- Accepts standard LEDs and incandescent displays as well as .500 [12.70] and .600 [15.24] high large displays.

## SPECIFICATIONS:

- Body material is red UL 94-HB Glass-filled Nylon. Consult factory for UL 94V-0 rated material.
- Bifurcated contacts are Grade A spring-tempered Phosphor Bronze per QQ-B-750.
- Contact plating is either 100μ [2.54μm] min. Tin per MIL-T-10727 or 10μ [2.54μm] min. Gold per MIL-G-45204, over 50μ [1.27μm] min. Nickel per QQ-N-290.
- Contact current rating=1.5 Amps.
- Operating temperature=221 °F [105°C] Tin plating, 257°F [125°C] Gold plating.
- Insertion Force=110 grams/pin average; Withdrawal Force=75 grams/pin average.
- Accepts flat leads up to .014 [.36] thick and .020 [.51] wide; round leads up to .020 [.51] in diameter.
- Accepts lead lengths: .075-.160 [1.91-4.06].


## MOUNTING CONSIDERATIONS:

- Suggested PCB hole size=.044 ± .002 [1.12 ± .05] dia.

## ALL DIMENSIONS: INCHES [MILLIMETERS]


"A"=(NO. OF PINS PER ROW X .100 [2.54]) + .050 [1.27]

"B"=(NO. OF PINS PER ROW - 1) X .100 [2.54]

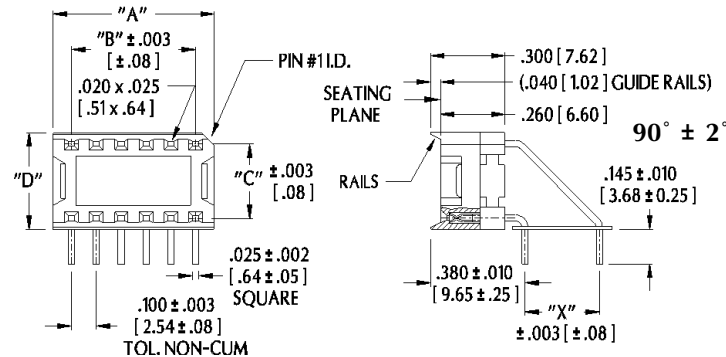


Consult factory for non-standard sizes

Centers "C"	Dim. "D"	Dim. "X"	Available Sizes
.200 [5.08]	.290 [7.37]	.100 [2.54]	8, 10
		.200 [5.08]	
		.300 [7.62]	
.300 [7.62]	.390 [9.91]	.100 [2.54]	8, 14 thru 20
		.200 [5.08]	
		.300 [7.62]	
.600 [15.24]	.690 [17.53]	.100 [2.54]	8 thru 40, 48
		.200 [5.08]	
		.300 [7.62]	

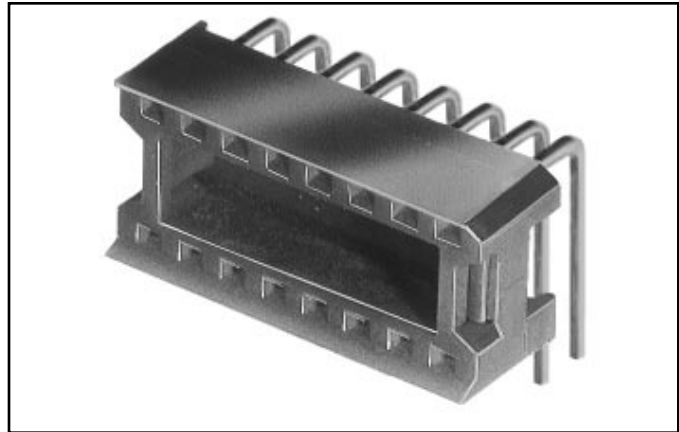


Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

## ORDERING INFORMATION

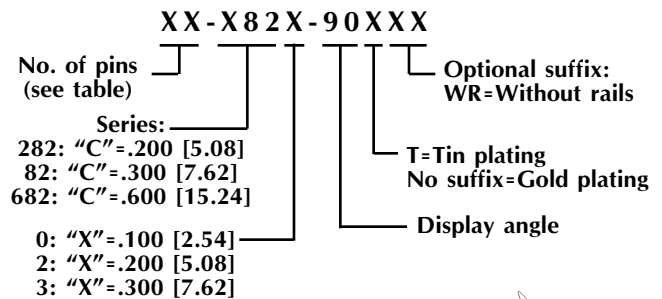


Consult Data Sheet No. 13002 for Vertical Mounting Vertisockets™ with bifurcated contacts.



Consult factory for other display angles

All tolerances ± .005 [.13] unless otherwise specified



**ARIES**  
ELECTRONICS, INC.

http://www.arieselec.com • info@arieselec.com

NORTH AMERICA  
Frenchtown, NJ USA  
TEL: (908) 996-6841  
FAX: (908) 996-3891

UK/SCANDINAVIA/IRELAND  
Milton Keynes, GB  
TEL: +44 1908 260007  
FAX: +44 1908 260008

EUROPE (MAINLAND)  
Papendrecht, Holland  
TEL: +31 78 615 94 65  
FAX: +31 78 615 43 11

13001  
REV.A